

## 100% Pass Guarantee PassLeader 350-018 Dumps with VCE and PDF for Free (Question 91 - Question 120)

New 350-018 exam questions from PassLeader 350-018 dumps! Welcome to download the newest PassLeader 350-018 VCE and PDF dumps: <http://www.passleader.com/350-018.html> (894 Q&As) P.S. Free 350-018 dumps are available on Google Drive shared by PassLeader:

[https://drive.google.com/open?id=0B-ob6L\\_QjGLpfJE1cHRyNEtmX3JfdU9CUFIRZnVxNjZUbWxsSnBpNXM0QjZYZjBXZVgyOTQ](https://drive.google.com/open?id=0B-ob6L_QjGLpfJE1cHRyNEtmX3JfdU9CUFIRZnVxNjZUbWxsSnBpNXM0QjZYZjBXZVgyOTQ)

QUESTION 91 Which three statements about IKEv2 are correct? (Choose three.) A. INITIAL\_CONTACT is used to synchronize state between peers. B. The IKEv2 standard defines a method for fragmenting large messages. C. The initial exchanges of IKEv2 consist of IKE\_SA\_INIT and IKE\_AUTH. D. Rekeying IKE and child SAs is facilitated by the IKEv2 CREATE\_CHILD\_SA exchange. E. NAT-T is not supported. F. Attribute policy push (via the configuration payload) is only supported in REQUEST/REPLY mode. Answer: ACD QUESTION 92 Which three statements about LDAP are true? (Choose three.) A. LDAP uses UDP port 389 by default. B. LDAP is defined in terms of ASN.1 and transmitted using BER. C. LDAP is used for accessing X.500 directory services. D. An LDAP directory entry is uniquely identified by its DN. E. A secure connection via TLS is established via the UseTLS operation. Answer: BCD QUESTION 93 Which two EAP methods may be susceptible to offline dictionary attacks? (Choose two.) A. EAP-MD5 B. LEAP C. PEAP with MS-CHAPv2 D. EAP-FAST Answer: AB QUESTION 94 Which PKCS is invoked during IKE MM5 and MM6 when digital certificates are used as the authentication method? A. PKCS#7 B. PKCS#10 C. PKCS#13 D. PKCS#11 E. PKCS#3 Answer: A QUESTION 95 Which mode of operation must be enabled on CSM to support roles such as Network Administrator, Approver, Network Operator, and Help Desk? A. Deployment Mode B. Activity Mode C. Workflow Mode D. User Roles Mode E. Administration Mode F. Network Mode Answer: C QUESTION 96 Which two ISE Probes would be required to distinguish accurately the difference between an iPad and a MacBook Pro? (Choose two.) A. DHCP or DHCPSPAN B. SNMPTRAP C. SNMPQUERY D. NESSUSE. HTTPF. DHCP TRAP Answer: AE QUESTION 97 Which configuration option will correctly process network authentication and authorization using both 802.1X and MAB on a single port? A.

```
interface FastEthernet1/0/9
 switchport access vlan 200
 switchport mode access
 switchport voice vlan 40
 ip access-group ACL-DEFAULT in
 authentication event fail action next-method
 authentication event server dead action authorize vlan 200
 authentication event server alive action reinitialize
 authentication host-mode multi-domain
 authentication open
 authentication order mab dot1x
 authentication priority dot1x mab
 authentication port-control auto
 authentication violation restrict
 mab
 dot1x pae authenticator
 dot1x timeout tx-period 10
 spanning-tree portfast
 ip dhcp snooping information option allow-untrusted
end
```

B.

```
interface FastEthernet1/0/9
 switchport access vlan 200
 switchport mode access
 switchport voice vlan 40
 ip access-group ACL-DEFAULT in
 authentication event fail action next-method
 authentication event server dead action authorize vlan 200
 authentication event server alive action reinitialize
 authentication host-mode multi-domain
 authentication open
 authentication order mab dot1x
 authentication priority dot1x mab
 authentication violation restrict
 mab
 dot1x pae authenticator
 dot1x timeout tx-period 10
 spanning-tree portfast
 ip dhcp snooping information option allow-untrusted
end
```

- C. interface FastEthernet1/0/9  
switchport access vlan 200  
switchport mode access  
switchport voice vlan 40  
ip access-group ACL-DEFAULT in  
authentication event fail action next-method  
authentication event server dead action authorize vlan 200  
authentication event server alive action reinitialize  
authentication host-mode multi-domain  
authentication open  
authentication order mab dot1x  
authentication priority dot1x mab  
authentication violation restrict  
mab  
dot1x pae authenticator  
dot1x timeout tx-period 10  
spanning-tree portfast  
ip dhcp snooping information option allow-untrusted  
end
- D. interface FastEthernet1/0/9  
switchport access vlan 200  
switchport mode access  
switchport voice vlan 40  
ip access-group ACL-DEFAULT in  
authentication event fail action next-method  
authentication event server dead action authorize vlan 200  
authentication event server alive action reinitialize  
authentication host-mode multi-domain  
authentication open  
authentication order mab dot1x  
authentication priority dot1x mab  
authentication port-control force-unauthorized  
authentication violation restrict  
mab  
dot1x pae authenticator  
dot1x timeout tx-period 10  
spanning-tree portfast  
ip dhcp snooping information option allow-untrusted  
end

Answer: B QUESTION 98 Which statement regarding the routing functions of the Cisco ASA is true? A. The translation table can override the routing table for new connections. B. The ASA supports policy-based routing with route maps. C. In a failover pair of ASAs, the standby firewall establishes a peer relationship with OSPF neighbors. D. Routes to the Null0 interface can be configured to black-hole traffic. Answer: A QUESTION 99 Which three statements are true about the Cisco ASA object configuration below? (Choose three.) object network vpnclients range 10.1.100.4 10.1.100.10 object network vpnclients nat (outside,outside) dynamic interface A. The NAT configuration in the object specifies a PAT rule. B. This configuration requires the command same-security-traffic inter-interface for traffic that matches this NAT rule to pass through the Cisco ASA appliance. C. The NAT rule of this object will be placed in Section 1 (Auto-NAT) of the Cisco ASA NAT table. D. This configuration is most likely used to provide Internet access to connected VPN clients. E. Addresses in the range will be assigned during config-mode. Answer: ABD Explanation:

<http://www.cisco.com/c/en/us/support/docs/security/asa-5500-x-series-next-generation-firewalls/116388-technote-nat-00.html>

QUESTION 100 Which three attributes may be configured as part of the Common Tasks panel of an authorization profile in the Cisco ISE solution? (Choose three.) A. VLAN B. voice VLAN C. dACL name D. voice domain permission E. SGT Answer: ACD QUESTION 101 Which two statements describe the Cisco TrustSec system correctly? (Choose two.) A. The Cisco TrustSec system is a partner program, where Cisco certifies third-party security products as extensions to the secure infrastructure. B. The Cisco TrustSec system is an approach to certifying multimedia and collaboration applications as secure. C. The Cisco TrustSec system is an Advanced Network Access Control System that leverages enforcement intelligence in the network infrastructure. D. The Cisco TrustSec system tests and certifies all products and product versions that make up the system as working together in a validated manner. Answer: CD QUESTION 102 Which option is the correct definition for MAB? A. MAB is the process of checking the mac-address-table on the local switch for the sticky address. If the mac-address of the device attempting to access the network matches the configured sticky address, it will be permitted to bypass 802.1X authentication. B. MAB is a process where the switch will send an authentication request on behalf of the endpoint that is attempting to access the network, using the mac-address of the device as the credentials. The authentication server evaluates that MAC address against a list of devices permitted

to access the network without a stronger authentication.C. MAB is a process where the switch will check a local list of MAC addresses to identify systems that are permitted network access without using 802.1X.D. MAB is a process where the supplicant on the endpoint is configured to send the MAC address of the endpoint as its credentials. Answer: B QUESTION 103Which three statements are true about the Cisco NAC Appliance solution? (Choose three.) A. In a Layer 3 OOB ACL deployment of the Cisco NAC Appliance, the discovery host must be configured as the untrusted IP address of the Cisco NAC Appliance Server.B. In a Cisco NAC Appliance deployment, the discovery host must be configured on a Cisco router using the "NAC discovery-host" global configuration command.C. In a VRF-style OOB deployment of the Cisco NAC Appliance, the discovery host may be the IP address that is on the trusted side of the Cisco NAC Appliance Server.D. In a Layer 3 IB deployment of the Cisco NAC Appliance, the discovery host may be configured as the IP address of the Cisco NAC Appliance Manager. Answer: ACD QUESTION 104Refer to the exhibit, which shows a partial output of the show command. Which statement best describes the problem?

```
sshvpn1#show webvpn context
Codes: AS - Admin Status, OS -
VHost - Virtual Host
Context Name AS OS
-----
vpn1 down down
```

A. Context vpn1 is not inservice.B. There is no gateway that is configured under context vpn1.C. The config has not been properly updated for context vpn1.D. The gateway that is configured under context vpn1 is not inservice. Answer: A QUESTION 105Review the exhibit. Which three statements about the Cisco IPS sensor are true? (Choose three.)

With inline VLAN pairs on a sensor:

- A. You cannot pair a VLAN with itself.
- B. For a given sensing interface, an interface can be a member of another inline interface.
- C. For a given sensing interface, a VLAN can be a member of one inline VLAN pair, however, a given interface can be a member of an inline VLAN pair on more than one sensing interface.
- D. The order in which you specify the VLANs is significant.
- E. A sensing interface in inline VLAN pairs can have up to 255 inline VLAN pairs.


A. AB. BC. CD. DE. E Answer: ACE QUESTION 106Refer to the exhibit. Which three command sets are required to complete this IPv6 IPsec site-to-site VTI? (Choose three.)

```
ip routing
crypto isakmp policy 1
 authentication pre-share
!
crypto isakmp key myPreShareKey0 address ipv6
 3FFE:2002::A8BB:CCFF:FE01:2C02/128
!
crypto ipsec transform-set 3des ah-sha-hmac esp-3des
!
crypto ipsec profile profile0
 set transform-set 3des
!
ipv6 cef
!
interface Tunnel0
 ipv6 address 3FFE:1001::64 eui-64
 ipv6 cef
 tunnel source Ethernet2/0
 tunnel destination 3FFE:2002::A8BB:CCFF:FE01:2C02
 tunnel protection ipsec profile profile0
```

A. interface Tunnel0tunnel mode ipsec ipv6B. crypto isakmp-profilematch identity address ipv6 anyC. interface Tunnel0ipv6 enabledD. ipv6 unicast-routingE. interface Tunnel0ipv6 enable-ipsec Answer: ACD QUESTION 107An internal DNS server requires a NAT on a Cisco IOS router that is dual-homed to separate ISPs using distinct CIDR blocks. Which NAT capability is required to allow hosts in each CIDR block to contact the DNS server via one translated address? A. NAT overloadB. NAT extendableC. NAT TCP load balancingD. NAT service-type DNSE. NAT port-to-application mapping Answer: B QUESTION 108Refer to the exhibit. Which option correctly identifies the point on the exhibit where Control Plane Policing (input) is applied to



incoming packets

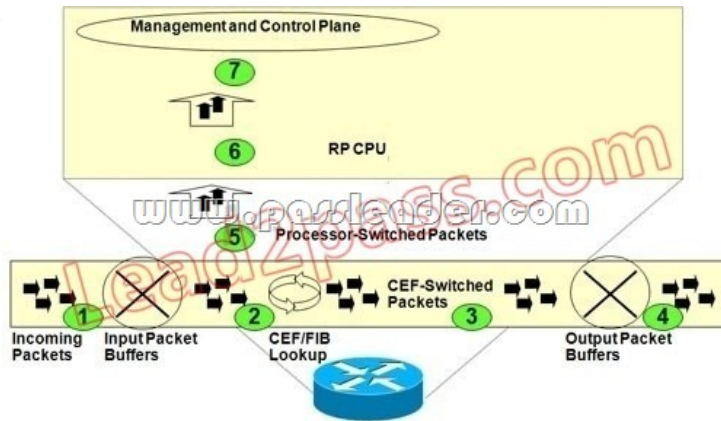

A. point 6B. point 7C. point 4D. point 1E. points 5 and 6 Answer: A QUESTION 109Which QoS marking is only locally significant on a Cisco router? A. MPLS EXPB. DSCP C. QoS groupD. IP precedenceE. traffic classF. flow label Answer: C QUESTION 110Which three control plane subinterfaces are available when implementing Cisco IOS Control Plane Protection? (Choose three.) A. CPUB. hostC. fast-cachedD. transitE. CEF-exceptionF. management Answer: BDE QUESTION 111Management Frame Protection is available in two deployment modes, Infrastructure and Client. Which three statements describe the differences between these modes? (Choose three.) A. Infrastructure mode appends a MIC to management frames.B. Client mode encrypts management frames.C. Infrastructure mode can detect and prevent common DoS attacks.D. Client mode can detect and prevent common DoS attacks.E. Infrastructure mode requires Cisco Compatible Extensions version 5 support on clients. Answer: ABD QUESTION 112Which three object tracking options are supported by Cisco IOS policy-based routing? (Choose three.) A. absence of an entry in the routing tableB. existence of a CDP neighbor relationshipC. existence of an entry in the routing tableD. results of an SAA operationE. state of the line protocol of an interface Answer: CDE QUESTION 113Which four protocols are supported by Cisco IOS Management Plane Protection? (Choose four.) A. Blocks Extensible Exchange Protocol (BEEP)B. Hypertext Transfer Protocol Secure (HTTPS)C. Secure Copy Protocol (SCP)D. Secure File Transfer Protocol (SFTP)E. Secure Shell (SSH)F. Simple Network Management Protocol (SNMP) Answer: ABEF QUESTION 114Which four Cisco IOS features are used to implement First Hop Security in IPv6? (Choose four.) A. IPv6 First-Hop Security Binding TableB. IPv6 Device TrackingC. IPv6 RA GuardD. SeNDE. IPv6 Selective Packet DiscardF. IPv6 Source Guard Answer: ABCD QUESTION 115According to ISO27001 ISMS, which of the following are mandatory documents? (Choose 4) A. ISMS PolicyB. Corrective Action ProcedureC. IS ProceduresD. Risk Assessment ReportsE. Complete Inventory of all information assets Answer: ABCD QUESTION 116Which current RFC made RFCs 2409, 2407, and 2408 obsolete? A. RFC 4306B. RFC 2401C. RFC 5996D. RFC 4301E. RFC 1825 Answer: C QUESTION 117Which of these is a core function of the risk assessment process? (Choose one.) A. performing regular network upgradesB. performing network optimizationC. performing network posture validationD. establishing network baselinesE. prioritizing network roll-outs Answer: C QUESTION 118Which two answers describe provisions of the SOX Act and its international counterpart Acts? (Choose two.) A. confidentiality and integrity of customer records and credit card informationB. accountability in the event of corporate fraudC. financial information handled by entities such as banks, and mortgage and insurance brokersD. assurance of the accuracy of financial recordsE. US Federal government informationF. security standards that protect healthcare patient data Answer: BD QUESTION 119In order to reassemble IP fragments into a complete IP datagram, which three IP header fields are referenced by the receiver? (Choose three.) A. don't fragment flagB. packet is fragmented flagC. IP identification fieldD. more fragment flagE. number of fragments fieldF. fragment offset field Answer: CDE QUESTION 120Which VTP mode allows the Cisco Catalyst switch administrator to make changes to the VLAN configuration that only affect the local switch and are not propagated to other switches in the VTP domain? A. transparentB. serverC. clientD. localE. pass-through Answer: A New 350-018 exam questions from PassLeader 350-018 dumps! Welcome to download the newest PassLeader 350-018 VCE and PDF dumps: <http://www.passleader.com/350-018.html> (894 Q&As) P.S. Free 350-018 dumps are available on Google Drive shared by PassLeader: [https://drive.google.com/open?id=0B-ob6L\\_QjGLpfjE1cHRyNEtmX3JfdU9CUFIRZnVxNjZUbWxsSnBpNXM0QjZYZjBXZVgyOTQ](https://drive.google.com/open?id=0B-ob6L_QjGLpfjE1cHRyNEtmX3JfdU9CUFIRZnVxNjZUbWxsSnBpNXM0QjZYZjBXZVgyOTQ)