

PassLeader Valid 300-175 Dumps with VCE and PDF (Question 81 - Question 100)

New 300-175 exam questions from PassLeader 300-175 dumps! Welcome to download the newest PassLeader 300-175 VCE and PDF dumps: <https://www.passleader.com/300-175.html> (353 Q&As --> 393 Q&As --> 439 Q&As --> 465 Q&As --> 481 Q&As)

P.S. New 300-175 dumps are available on Google Drive shared by PassLeader:

https://drive.google.com/open?id=0B-ob6L_QjGLpcTYwUlg5R2o2Tlk

Read More [CCNP Data Center Exam](#) Dumps:

CCNP Data Center [300-160](#) Exam Dumps: <http://www.ciscovceplus.com/?s=300-160>

CCNP Data Center [300-165](#) Exam Dumps: <http://www.ciscovceplus.com/?s=300-165>

CCNP Data Center [300-170](#) Exam Dumps: <http://www.ciscovceplus.com/?s=300-170>

CCNP Data Center [300-180](#) Exam Dumps: <http://www.ciscovceplus.com/?s=300-180>

QUESTION 81



Questions

1 We are working on which server?

2 ☐ 1

3 ☐ 2

4 ☐ 3

5 ☐ 4

6 ☐ 5

www.passleader.com

Answer:



Questions

1 We are working on which server?

2 ☐ 1

3 ☐ 2

4 ☐ 3

5 ☒ 4


6 ☐ 5

www.passleader.com

QUESTION 82

.....

QUESTION 84



Questions

1 We are working on which Chassis ID?

2 ☐ 1

3 ☐ 2

4 ☐ 3

5 ☐ 4

6 ☐ 5

www.passleader.com

Answer:

Questions

1 We are working on which Chassis ID?

2 ☒ 1

3 ☐ 2

4 ☐ 3

☐ 4

☐ 5

www.pastleader.com

QUESTION 85

Questions

1 Current Adapter Status is ?

2 ☐ Operable

3 ☒ Down

4 ☐ Inoperable

☐ Unknown

www.parsleadet.com

Answer:

Questions

1 Current Adapter Status is ?

2 ☒ Operable

3 ☐ Down

4 ☐ Inoperable

☐ Unknown

www.parrleader.com

QUESTION 86

1 Current Adapter Connected Status is?

2 ☐ Operable

3 ☐ Down

4 ☐ Inoperable

☐ Unknown

www.parsleader.com

Answer:

1 Current Adapter Connected Status is?

2 ☐ Operable

3 ☐ Down

4 ☐ Inoperable

☒ Unknown

www.pazzleader.com

QUESTION 87

When upgrading a standalone Cisco UCS C-Series server, which method is correct?

- A. Direct upgrade on all components
- B. Cisco Hardware Upgrade Utility
- C. Cisco Host Upgrade Utility
- D. Cisco Server Upgrade Utility

Answer: C

QUESTION 88

In a standalone Cisco UCS C-Series server, which recommendations can be used to upgrade the BIOS?

- A. Cisco IMC
- B. Cisco UCS Manager
- C. iFlash32 Utility
- D. Flash ROM Utility
- E. EFI Interface
- F. Cisco Host Upgrade Utility
- G. USB Flash Utility

Answer: F

QUESTION 89

What are the default settings of the Cisco IMCCIMC NIC properties on a standalone Cisco UCS C-Series server?

- A. 'Shared LOM' NIC mode with 'Active-active' NIC redundancy and DHCP enabled
- B. 'Shared LOM' NIC mode with 'Active-standby' NIC redundancy and DHCP enabled
- C. 'Dedicated' NIC mode with 'Active-standby' NIC redundancy DHCP disabled
- D. 'Dedicated' NIC mode with 'None' NIC redundancy and DHCP enabled
- E. 'Cisco Card' NIC mode with 'Active-active' NIC redundancy and DHCP enabled

Answer: D

QUESTION 90

Which adapter is capable of supporting VM-FEX?

- A. VIC 1280
- B. Cisco UCS M61KR-I
- C. Cisco UCS M72KR
- D. Cisco UCS M51KR-B

Answer: A

QUESTION 91

Which option does UEFI secure boot provide?

- A. checksum verification of the EFI shell
- B. certificate verification of the EFI shell
- C. checksum verification of the OS
- D. certificate verification of the OS

Answer: D

QUESTION 92

Which component is unsupported by the UEFI boot device in the Cisco UCS C-series standalone?

- A. FlexFlash card
- B. RAID array
- C. FCoE
- D. iSCSI
- E. USB
- F. PXE
- G. PCI SSD

Answer: G

QUESTION 93

Which statement about Cisco Integrated Management Controller secure mode is true?

- A. After you enable it, you cannot disable it.
- B. After you enable it, you cannot downgrade the Cisco Integrated Management Controller firmware.
- C. It verifies the OS before allowing it to boot.
- D. The server must reboot to apply.

Answer: A

QUESTION 94

When implementing a Cisco UCS C-series standalone server, which of the following Cisco Integrated Management Controller NIC modes allow use of the least number of physical ports while providing maximum levels of redundancy?

- A. dedicated
- B. shared LOM
- C. shared LOM 10G
- D. Cisco VIC

Answer: D

QUESTION 95

Which option describes what Cisco Integrated Management Controller Network Security provides?

- A. protection against DDoS on the Cisco IMC
- B. a whitelist that specifies the servers allowed to access the Cisco IMC
- C. 802.1x support, allowing the Cisco IMC to log in to a port security network
- D. user-configured ACLs to block known bad servers from accessing the Cisco IMC

Answer: A

QUESTION 96

Which port type mode must be used on a Cisco UCS Manager for a SPAN port?

- A. eth-traffic-mon
- B. eth-uplink
- C. eth-server
- D. eth-storage

Answer: A

QUESTION 97

Where would you disable or enable Cisco Discovery Protocol?

- A. LAN connectivity policy
- B. service profile
- C. network control policy
- D. LAN uplinks manager

Answer: C

QUESTION 98


Which three statements about default settings for fabric interconnect uplink ports are true? (Choose three.)

- A. When a VLAN is configured, it is trunked on all uplinks.
- B. Specific VLANs are trunked on specific uplinks.
- C. UDLD is enabled.
- D. UDLD is disabled.
- E. Cisco Discovery Protocol is enabled.
- F. Cisco Discovery Protocol is disabled.
- G. They connect to the I/O modules.

Answer: ADE

QUESTION 99

Refer to the exhibit. An admin is configuring VLANs on a Cisco UCS B-Series vNIC. Which two statements about the traffic coming from the operating system with this configuration are true? (Choose two.)

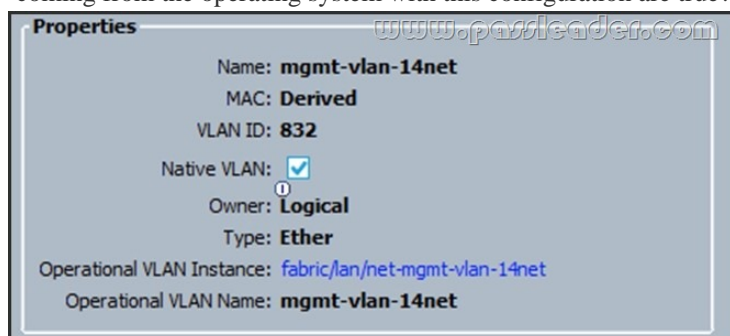

- A. The VLAN must be configured with ID 832 within the operating system.
- B. No VLAN tag should be added in the operating system.
- C. If traffic comes in untagged on this vNIC, it is placed in VLAN 832.
- D. This configuration is not supported when hypervisors are used.
- E. The uplink ports of the fabric interconnect have the native VLAN set to ID 832.

Answer: BC

QUESTION 100

Refer to the exhibit. Which two statements about the fabric interconnect are true? (Choose two.)

FI-B(nxos)# show platform software enm internal info vlandb id 311

vlan_id 311

Designated receiver: Po21

Membership:

Po22 Eth1/32 Eth1/20 Po1 Po21 Po30

- A. The fabric interconnect forwards all broadcast packets on VLAN 311 out of each interface listed in the Membership.
- B. The fabric interconnect forwards broadcasts on VLAN 311 only when they are received on Po21.
- C. Without any changes to the switch, eth 1/32 could become the designated receiver for VLAN 311.
- D. All multicast traffic from a blade on VLAN 311 goes out of Po21.
- E. IGMP join packets from blades on VLAN 311 goes out Po21.

Answer: BE

New 300-175 exam questions from PassLeader 300-175 dumps! Welcome to download the newest PassLeader 300-175 VCE and PDF dumps: <https://www.passleader.com/300-175.html> (353 Q&As --> 393 Q&As --> 439 Q&As --> 465 Q&As --> 481 Q&As)

P.S. New 300-175 dumps are available on Google Drive shared by PassLeader:

https://drive.google.com/open?id=0B-ob6L_QjGLpcTYwUlg5R2o2Tlk

Read More CCNP Data Center Exam Dumps:

CCNP Data Center 300-160 Exam Dumps: <http://www.ciscovceplus.com/?s=300-160>

CCNP Data Center 300-165 Exam Dumps: <http://www.ciscovceplus.com/?s=300-165>

CCNP Data Center 300-170 Exam Dumps: <http://www.ciscovceplus.com/?s=300-170>

CCNP Data Center 300-180 Exam Dumps: <http://www.ciscovceplus.com/?s=300-180>